




FLOORING & DECKING SOLUTIONS

**Euro Oak Solid Rustic
Technical Data Sheet**

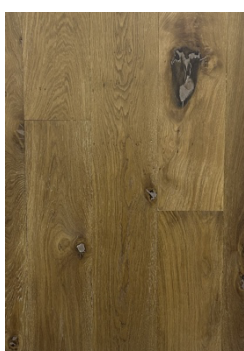

Product	Euro Oak Solid 180mm x 20mm Rustic
Dimensions	180mm x 20mm x 500mm – 2200mm lengths, random. Micro bevel.
Grading	Rustic grade - Has fairly large knots and some cracks with brown filler in the boards. Has sap wood.
Construction	20mm European Oak solid all the way through. Tongue and grooved, ends matched. FSC certified.
Guarantee	Zimbos Flooring Solutions offers a 5 year guarantee on the solid Oak subject to normal conditions. This means in an environment with a relative humidity of 40 – 60%. This is subject to product being glued down with Wakol MS 230 adhesive, and Wakol PU 280 moisture barrier when concrete screed residual moisture (measured with Concrete Tramex meter) is above 3.0% moisture content
Formaldehyde	Emission E1
Pentachlorophenol	Emission > 5%

Underfloor heating	Temperature compliant to 27 degrees.
Installation method	Glue down (according to SAWLFA specifications)

2 Panther Park, 11 Berkley Road, Maitland, 7405

Tel: +27 21 511 4693

Fax: +27 21 511 4694

www.zimbostrading.co.za

www.loba.co.za

www.wakol.co.za

Reg No: 2002/023222/23

Vat No: 424 019 8855

Members of C.C.: D.O. Waddy & H.A du Toit