



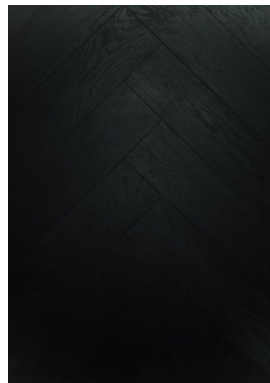

ZIMBO'S

FLOORING & DECKING SOLUTIONS

Oak Herringbone Technical Data Sheet

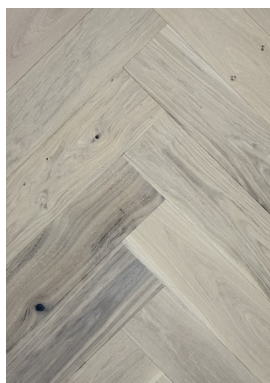

Product	Oak Multilayer Herringbone 150mm x 15mm x 600mm Rustic
Dimensions	150mm x 15mm x 600mm with a 4mm top layer of European Oak.
Grading	Rustic grade. Has knots and some small filled cracks in the boards, as well as less than 10% sap wood.
Construction	11mm Birch multilayer base for excellent stability, with a 4mm Oak layer from PEFC certified timber.
Guarantee	Zimbo's Flooring Solutions offers a 5 year guarantee against delamination of the Oak veneer and the cracking or buckling of the floor board subject to normal conditions. This means in an environment with a relative humidity of 40 – 60%. This is subject to product being glued down with Wakol MS 228 adhesive, and Wakol PU 280 moisture barrier when concrete screed residual moisture (measured with Concrete Tramex meter) is above 4.5% moisture content.
Formaldehyde	Emission E1
Pentachlorophenol	Emission > 5%

Underfloor Heating	Underfloor heating: Temperature compliant to 27 degrees.
Installation method	Glue down (according to SAWLF specifications)

2 Panther Park, 11 Berkley Road, Maitland, 7405

Tel: +27 21 511 4693

Fax: +27 21 511 4694

www.zimbostrading.co.za

www.loba.co.za

www.wakol.co.za

Reg No: 2002/023222/23

Vat No: 424 019 8855

Members of C.C.: D.O. Waddy & H.A du Toit